





PIPE SECTION




BEND 30°



BEND 90°



T-PIECE




PIPE REDUCER




BEND 15°




BEND 45°




U-BEND




Y-PIECE




SUPPORT RING

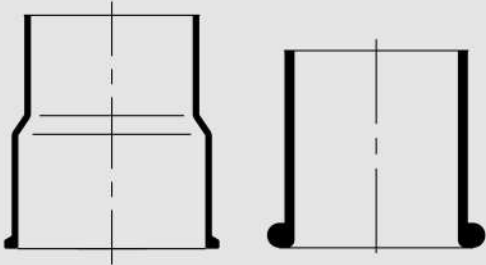


ADAPTOR




TRAP

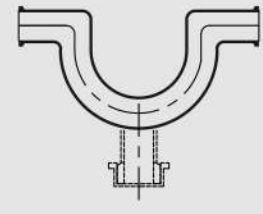


TRAPS

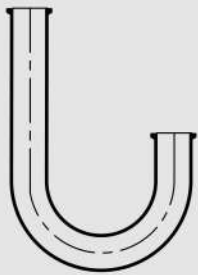


TRAP




SUPPORT



COUPLING



CLOSURE

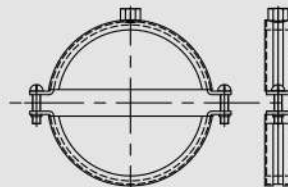

TUBE HANGER



Goel Scientific Canada

69, Yardley Crecent, Brampton ON. L6X5L7 Toronto Canada

Phone : +1-416-912-1530

E-mail : canada@goelscientific.com

Website : www.goelscientific.ca

BOROSILICATE GLASS BEADED PIPES & COMPONENTS

Borosilicate Glass Beaded Pipes are excellent corrosion resistant. The smooth surface of the glass prevents the sticking of the dirt & thus enables visual monitoring. Borosilicate Glass Beaded Pipes are best suited for chemically/organically contaminated waste water, waste gases, exhaust air, laboratory building drainage, Kitchen wastewater, sanitary wastewater, wastewater at airport runways etc.

Borosilicate Glass Beaded Pipes are durable against acids, salty solutions & other organic substances. Due to the above, Borosilicate Beaded Pipe are better in such application in comparison to metals & plastics.

All the beaded pipes are suitable for operating pressure of 0.5 bar (g). Beaded pipes joints are vacuum proof & are suitable for working temperature up to 120°C only.

We offer Beaded Pipes & components from DN 40 to DN 150. In case you have requirement of bigger diameter component, feel free to discuss.

Dimensions of Beaded flange.

DN	D	D1
40	46	52
50	59	65
80	85	94
100	115	123
150	165	181

